

NOTES:

1. MATERIAL

1.1 CABLE: [(28 AWG X 1PAIR) + D + FAM] X 5 + (28 AWG X 4C) + AB (128/28 AWG ALM)+D7/0.16TC], BLACK PVC JACKET.

OD: 7.3 ± 0.2 mm

1.2 CONNECTOR: DISPLAYPORT 20P MALE: BLACK INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL.

1.3 STRAIN RELIEF MOLDED BLACK PVC.

1.4 HOOD MOLDED: ASSEMBLY TYPE, BLACK.

1.5 ALL COMPONENTS ARE RoHS COMPLIANT.

2. ELECTRICAL


2.1 100% OPEN AND SHORT TEST

2.2 CONDUCTOR RESISTANCE: 3 OHMS

2.3 INSULATION RESISTANCE: 10 MEGOHMS


2.4 HI-POT: DC200V/0.01S

3. PACKING: EACH CABLE IN A PE BAG .

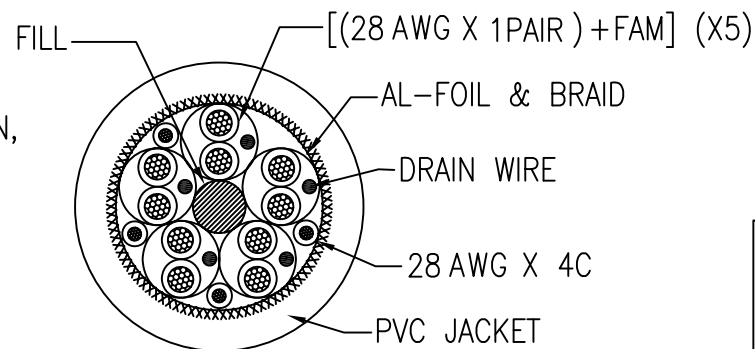


SECTION: A-A

FAM = FREE-EDGE AL-FOIL MYLAR



PIN OUT

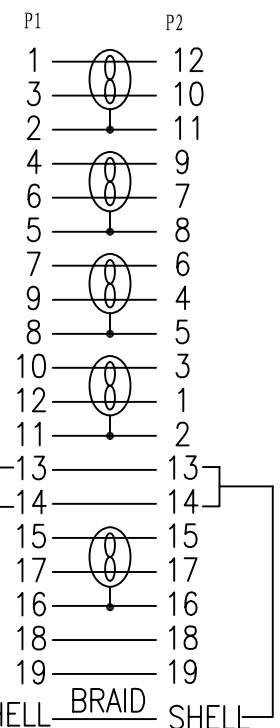

APPROVED	CHECKED	DRAWN	CUSTOMER:	DESCRIPTION:	
			ITEM NO.	DP-1030	
			DRAW NO.		
			UNIT	m m	
			SCALE	NONE	
DISPLAYPORT CABLE 20P M/M					