


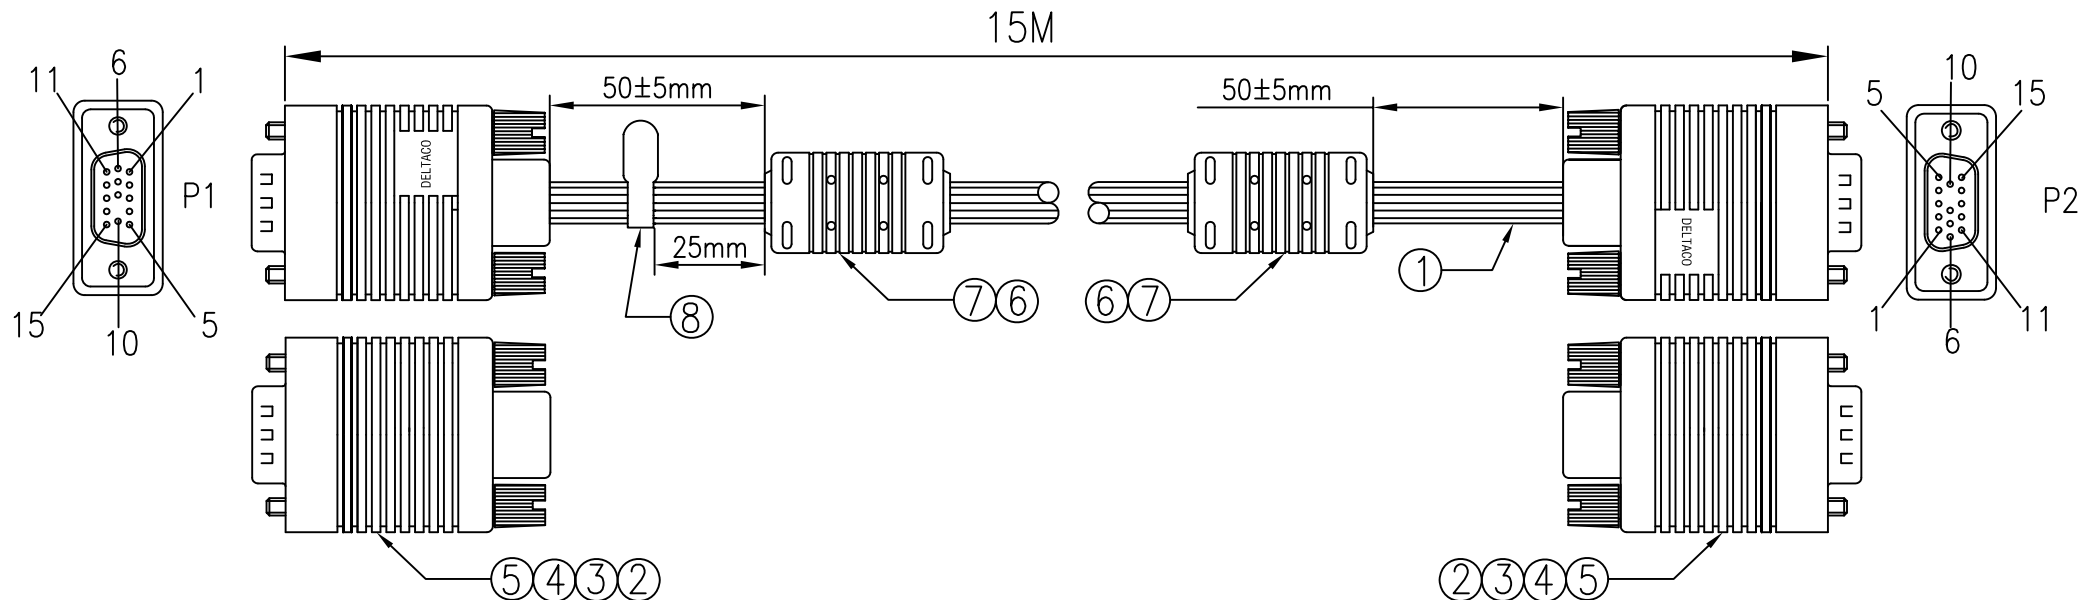

PIN OUT

P1		P2	
1	○	1	RED
6	○	6	
2	○	2	GREEN
7	○	7	
3	○	3	BULE
8	○	8	
4		4	
5		5	
10		10	
11		11	
12		12	
13		13	
14		14	
15		15	
SHEEL		SHELL(BRAID+DRAIN)	

NOTES:

1.ELECTRICAL PROPERTIES:

1.1 100% OPEN AND SHORT TEST

1.2 CONDUCTOR RESISTANCE: 5 OHMS

1.3 INSULATION RESISTANCE: 10 MEGOHMS

1.4 HI-POT: DC300V/0.01S

2. ALL MATERIAL BE RoHS COMPLIANT.

⑧	TAG	1PCS	DELTACO TAG
⑦	CORE MOLD	2PCS	GRAY PVC
⑥	CORE	2PCS	OD*ID*L: 17.5*10.5*28.5mm
⑤	SCREW	2PCS	#4-40 UNC, 4*46mm HOOD MOLDED: BLUE PVC
④	HDMI HOOD	2PCS	BLUE PVC
③	INNER MOLD	2PCS	PE
②	HDB 15P M	2PCS	NICKIEL PLATED SHELL, UNLDAAD 9PIN
①	CABLE	1PCS	(28AWG*1C+S+PVC)*3+24AWG*8C+AEB OD:9.0mm GRAY PVC JACKET
NO.	PARTS NAME	Q'TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER :	
			ITEM NO .	RGB-8D
			DRAW NO .	
			UNIT	m m
			SCALE	NONE

DESCRIPTION :

HDB 15/M-HDB 15/M
(PIN 9 MISSING)

