

Wireless Inspection Camera with Color LCD Monitor

Your Extended Eyes & Hands!

Model No.: 8802AJ

Allows for easy visual inspections in hard-to-reach areas. Lightweight, handheld design for easily find, diagnose and Solve problems with the flexible extended tube & useful accessories.

See it!

Clearly in narrow spot, even in total dark or underwater

Find it!

Fast, no more struggling with the mirror & flash light

Solve it!

Easily, speed up the solution with extended accessories



Hitch Up & Go!!



Structure



*Rechargeable Li-battery inside

Wide Usage


- Checking for internal leaks around chimney flashing.
- Reading the Model number off a furnace fan motor.
- Retrieve a screw lost under the refrigerator.
- Checking the teeth on a kitchen garbage disposal.

And More...

- Reading the Service tag on a hard-to-reach equipments.
- Inspecting inside of 2" heat exchanger tubes (boiler)
- Examining AC coils in a residential furnace.
- Finding Romex installed in a closed wall cavity.
- Checking Cold Air Return for debris.
- Checking for Lint Buildup past the primary filter in a dryer.
- Checking sink connections in a crowded sink space.
- Checking the gas connections under an installed stove.

GOSPELL Smarhome Electronic Co., LTD

Add: 4~5Floor/Block 2, Vision(SZ) Park, South Hi-Tech Park, Nanshan, Shenzhen, P.R.China
 TEL: +86-755-26716688 +86-755-26716201
 FAX: +86-755-26716099
 Post code: 518057
 www.goscam.com
 E-mail:sales@goscam.com

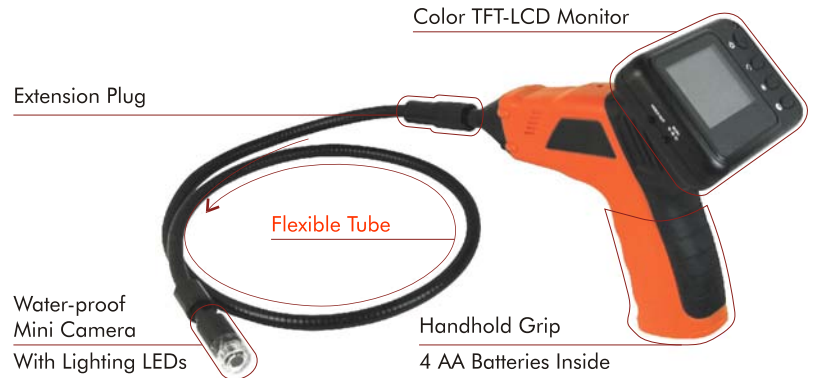

Specifications

	Items	Specifications
CAMERA	Imaging Sensor	CMOS
	Total Pixels	704×576 (PAL); 712×486(NTSC)
	Horizontal View Angle	50 degree
	Transmission Frequency	2468MHz
	Minimum Illumination	0 Lux
	Modulation Type	FM
	Bandwidth	18MHz
	Power Supply	4 x AA
	Dimensions(W×D×H)	186×145×41(mm)(Exclude Flexible Tube)
	Weight(about)	530g
RECEIVER	LCD Screen Type	2.36" TFT-LCD
	Effective Pixels	480×240
	Video System	PAL/NTSC
	Transmission Frequency	2468MHz
	Exterior Supply Voltage)	8V-36V _{DC}
	Consumption Current (Max.)	450mA
	Video Output Level	0.9-1.3V _{rms} @75ohm
	Dimensions(W×D×H)	100×70×30(mm)
	Weight(About)	140g
	Operating Temperature	-10°C~+50°C/+14°F~+122°F
Operating Humidity(Max.)	15~85%RH	

* Actual transmission range may vary according to weather, location, interference or building construction.
 * All the specifications are subject to minor change without prior notice.